

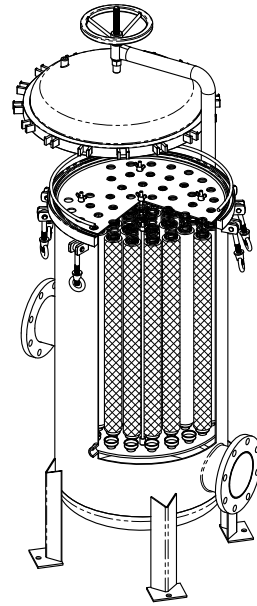
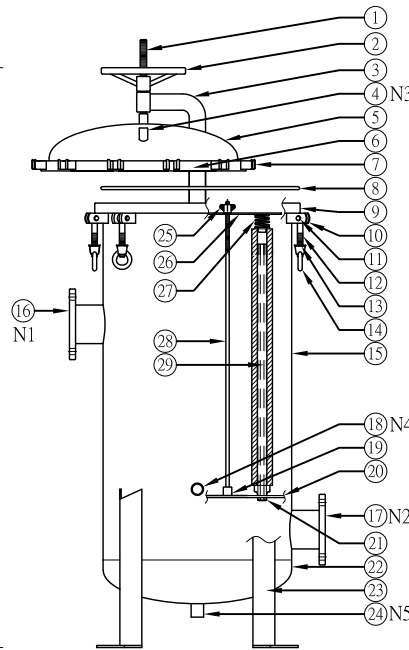
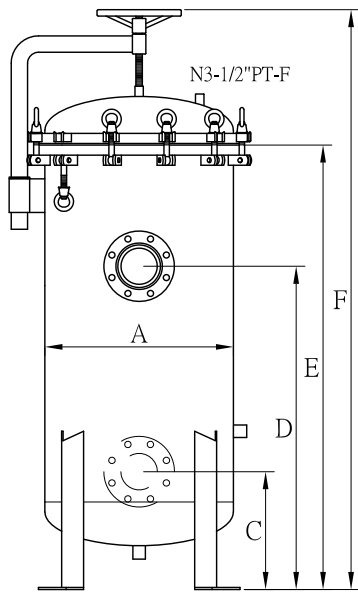




# TL SERIES >>> 多支裝濾芯機

## Multi-Cartridges Filter Housing

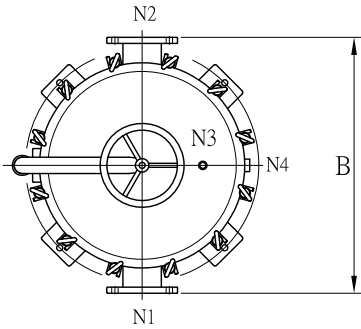

- ... 設計壓力 Design P. ... 10kg/cm<sup>2</sup>
- ... 操作壓力 Operating P. ... 7kg/cm<sup>2</sup>
- ... 設計溫度 Design T. ... 100°C
- ... 操作溫度 Operating T. ... 75°C

NO.	名稱 Description	NO.	名稱 Description
1	螺桿 Screw	16	入水口 Port inlet
2	轉盤 Turntable	17	出水口 Port outlet
3	吊架(桿) Davit arm	18	排放口 Drain
4	排氣口 Vent	19	集水板螺母 Nut
5	上蓋 Top cover	20	集水板 Cartridge support plate
6	上蓋唇 Top cover flange	21	杯座 Pedestal
7	環首螺母座 Eye nut socket	22	端板 Bottom cover
8	O型環 O-ring	23	腳架 Support Leg
9	桶唇 Shell flange	24	排放口 Drain
10	單眼螺絲座 Eye bolt socket	25	壓板螺母 Nut
11	心軸 Spindle	26	壓板 Pressure plate
12	單眼螺絲 Eye bolt	27	彈簧組 Springs
13	華司 Washer	28	雙頭牙條 Center post
14	環首螺母 Eye nut	29	濾芯角條 Cartridge post
15	桶體 Shell		

型式 Model	Length of Cartridge	N1 / N2	N4 / N5	A m/m	B m/m	C m/m	D m/m	E m/m	F m/m	G(PCD) m/m	H m/m	M <sup>3</sup> /Hr	GPM	重量 Weight	容量 Volume
8 ~ 12	30"	2"~4"	1"PT-F	ø306	506	350	700	1320	(1638)	ø416	ø14	24~36	120~180	77kg	89L
	40"	2"~4"	1"PT-F	ø306	506	350	700	1570	(1888)	ø416	ø14	32~48	160~240	85kg	107L
13 ~ 20	30"	2"~4"	1"PT-F	ø406	606	350	700	1320	(1694)	ø516	ø14	39~60	195~300	105kg	165L
	40"	2"~4"	1"PT-F	ø406	606	350	700	1570	(1944)	ø516	ø14	52~80	260~400	125kg	198L
21 ~ 28	30"	3"~4"	1"PT-F	ø486	686	350	700	1320	(1709)	ø596	ø14	63~84	315~420	120kg	239L
	40"	3"~4"	1"PT-F	ø486	686	350	700	1570	(1959)	ø596	ø14	84~112	420~560	145kg	286L
29 ~ 40	30"	3"~4"	1"PT-F	ø560	760	350	700	1320	(1726)	ø704	ø18	87~108	435~540	190kg	327L
	40"	3"~4"	1"PT-F	ø560	760	350	700	1570	(1976)	ø704	ø18	116~138	580~720	225kg	389L
41 ~ 45	30"	6"	1"PT-F	ø600	800	400	800	1400	(1823)	ø744	ø18	111~138	555~690	200kg	401L
	40"	6"	1"PT-F	ø600	800	400	800	1650	(2074)	ø744	ø18	148~184	740~920	230kg	460L
46 ~ 53	30"	6"	1"PT-F	ø650	850	450	850	1450	(1880)	ø794	ø18	141~168	705~840	242kg	484L
	40"	6"	1"PT-F	ø650	850	450	850	1700	(2130)	ø794	ø18	188~224	940~1120	280kg	567L
54 ~ 81	30"	6"	1 1/2"PT-F	ø762	962	500	950	1500	(2080)	ø962	ø19	171~243	855~1215	365kg	665L
	40"	6"	1 1/2"PT-F	ø762	962	500	950	1750	(2330)	ø962	ø19	228~324	1140~1620	408kg	802L
82 ~ 112	30"	8"	2"PT-F	ø900	1100	550	1000	1620	(2233)	ø1100	ø19	246~285	1230~1425	687kg	1042L
	40"	8"	2"PT-F	ø900	1100	550	1000	1870	(2483)	ø1100	ø19	328~380	1640~1900	715kg	1201L
113 ~ 137	30"	8"	2"PT-F	ø1000	1200	600	1100	1670	(2307)	ø910	ø22	288~405	1440~2025	791kg	1350L
	40"	8"	2"PT-F	ø1000	1200	600	1100	1920	(2537)	ø910	ø22	384~540	1920~2700	832kg	1546L
138 ~ 151	30"	10"	2"PT-F	ø1100	1300	650	1250	1780	(2442)	ø1010	ø22	408~465	2040~2325	1046kg	1580L
	40"	10"	2"PT-F	ø1100	1300	650	1250	2030	(2692)	ø1010	ø22	544~620	2720~3100	1102kg	1817L
152~ 198	30"	12"	2"PT-F	ø1220	1400	650	1250	1780	(2465)	ø1130	ø22	468~692	2340~2595	1188kg	1955L
	40"	12"	2"PT-F	ø1220	1400	650	1250	2030	(2715)	ø1130	ø22	624~692	3120~3460	1247kg	2238L